


Übergangverschraubung flachdichtend mit IG und Messing Überwurfmutter.

**NEW**



## Technische Spezifikationen

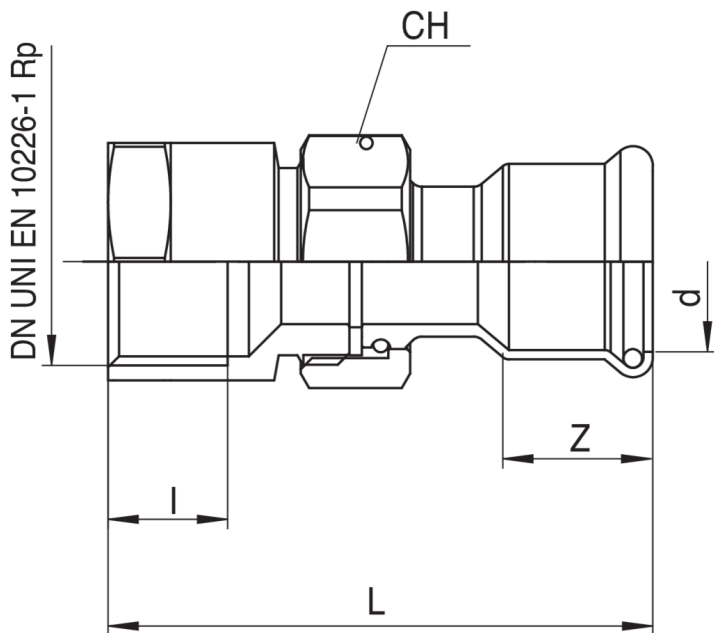

| <b>D X R</b> | <b>BAG</b> | <b>MASTER BOX</b> | <b>CODE</b>     | <b>I</b> | <b>L</b> | <b>Z</b> | <b>CH</b> |
|--------------|------------|-------------------|-----------------|----------|----------|----------|-----------|
| 15 x 1/2"    | 10         | 150               | CMF345A12015000 | 15       | 62       | 19       | 30        |
| 18 x 1/2"    | 10         | 120               | CMF345A12018000 | 15       | 62       | 19,5     | 30        |
| 18 x 3/4"    | 10         | 120               | CMF345A34018000 | 16,3     | 65       | 19,5     | 30        |
| 22 x 3/4"    | 5          | 100               | CMF345A34022000 | 16,3     | 77       | 21       | 30        |
| 22 x 1"      | 5          | 100               | CMF345B01022000 | 19,1     | 84,5     | 21       | 30        |
| 28 x 1"      | 5          | 80                | CMF345B01028000 | 19,1     | 87       | 22       | 37        |
| 35 x 1"1/4   | 5          | 40                | CMF345B14035000 | 21,4     | 100      | 27       | 46        |
| 42 x 1"1/2   | 2          | 30                | CMF345B12042000 | 21,4     | 105      | 30       | 52        |
| 54 x 2"      | 2          | 20                | CMF345C02054000 | 25,7     | 124,5    | 35       | 64        |

## Anwendungen



HEATING



HVAC



COMPRESSED  
AIR