


Übergangsfitting AG.

NEW

Technische Spezifikationen

UNI EN10226 - Rp

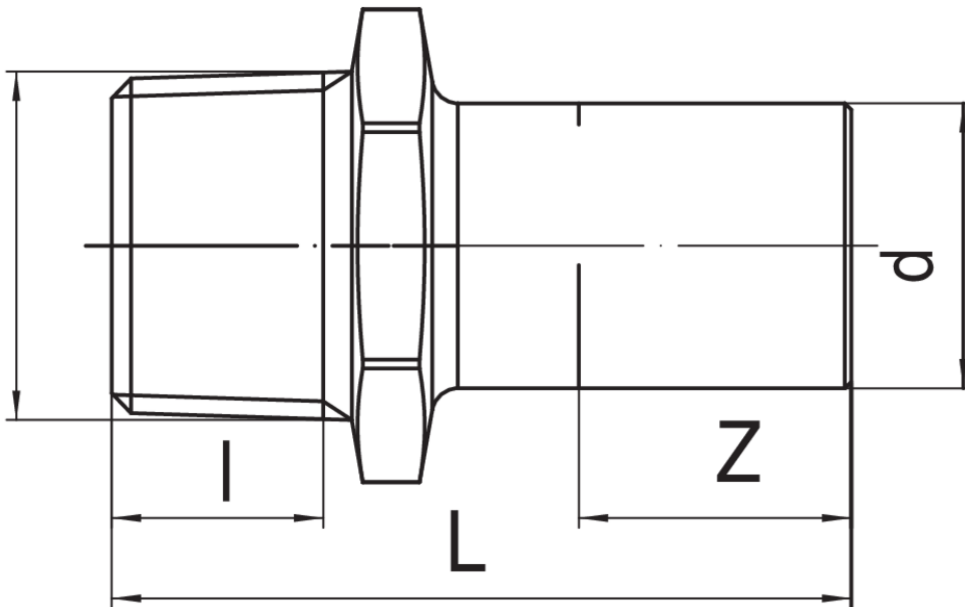

| DX RP | BAG | MASTER BOX | CODE | L | Z | L |
|-----------|-----|------------|-----------------|------|------|------|
| 15 x 1/2" | 10 | 300 | MXF244A12015000 | 52 | 19 | 15 |
| 18 x 1/2" | 10 | 250 | MXF244A12018000 | 52 | 19,5 | 15 |
| 18 x 3/4" | 10 | 200 | MXF244A34018000 | 56 | 19,5 | 16,3 |
| 22 x 1/2" | 5 | 150 | MXF244A12022000 | 53,5 | 21 | 15 |
| 22 x 3/4" | 5 | 150 | MXF244A34022000 | 57 | 21 | 16,3 |
| 28 x 3/4" | 5 | 150 | MXF244A34028000 | 57 | 22 | 16,3 |

Anwendungen



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



FIREFIGHTING



MARINE



STEAM



SOLAR



INDUSTRIAL