


Copper F/F coupling.

Technical specifications

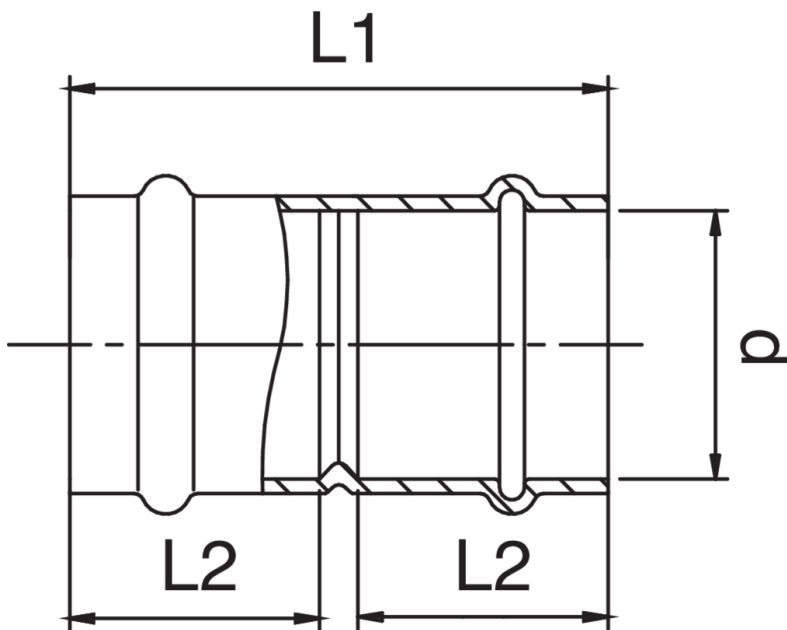

| D | BAG | MASTER BOX | CODE | L1 | L2 |
|----|-----|------------|-----------------|----|----|
| 15 | 10 | 200 | HT9270015015000 | 49 | 22 |
| 18 | 10 | 150 | HT9270018018000 | 52 | 23 |
| 22 | 10 | 100 | HT9270022022000 | 53 | 24 |
| 28 | 10 | 60 | HT9270028028000 | 57 | 25 |
| 35 | 5 | 40 | HT9270035035000 | 62 | 26 |

Applications



SOLAR



STEAM



COMPRESSED
AIR



INDUSTRIAL

