



OT5520

Male thread coupling.

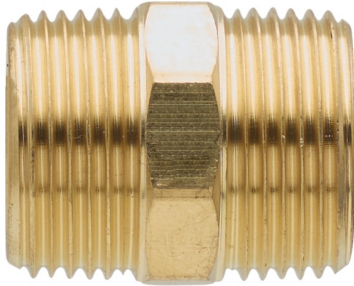

Technical specifications

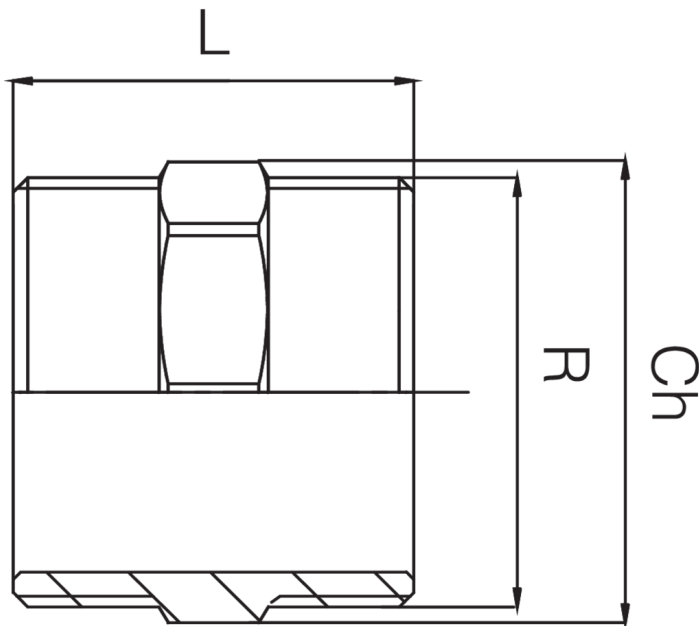

| R | BAG | MASTER BOX | CODE | L | CH |
|-------|-----|------------|-----------------|----|----|
| 1/4" | 10 | 100 | OT5520A14A14000 | 22 | 14 |
| 3/8" | 10 | 300 | OT5520A38A38000 | 26 | 17 |
| 1/2" | 10 | 250 | OT5520A12A12000 | 28 | 21 |
| 3/4" | 10 | 150 | OT5520A34A34000 | 31 | 27 |
| 1" | 10 | 100 | OT5520B01B01000 | 40 | 34 |
| 1"1/4 | 5 | 50 | OT5520B14B14000 | 45 | 42 |
| 1"1/2 | 5 | 40 | OT5520B12B12000 | 47 | 48 |
| 2" | 5 | 25 | OT5520C02C02000 | 55 | 60 |
| 2"1/2 | 5 | 10 | OT5520C12C12000 | 65 | 90 |
| 3" | 5 | 25 | OT5520D03D03000 | 75 | 95 |

Applications



DRINKING WATER



HEATING



HVAC



GAS



COMPRESSED AIR



SOLAR



FIREFIGHTING