


Raccord trois pièces à siège plan, taraudée femelle avec écrou en laiton.

**NEW**



## Spécifications techniques

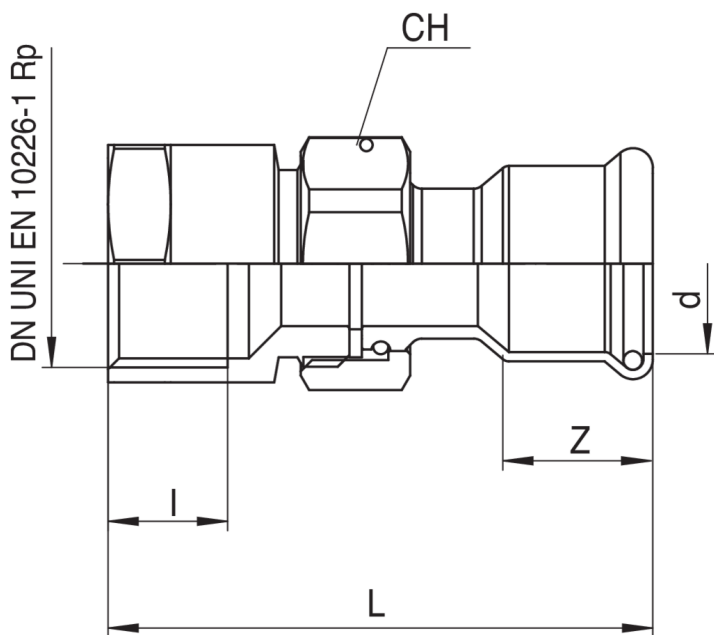

<b>D X R</b>	<b>BAG</b>	<b>MASTER BOX</b>	<b>CODE</b>	<b>I</b>	<b>L</b>	<b>Z</b>	<b>CH</b>
15 x 1/2"	10	150	CMF345A12015000	15	62	19	30
18 x 1/2"	10	120	CMF345A12018000	15	62	19,5	30
18 x 3/4"	10	120	CMF345A34018000	16,3	65	19,5	30
22 x 3/4"	5	100	CMF345A34022000	16,3	77	21	30
22 x 1"	5	100	CMF345B01022000	19,1	84,5	21	30
28 x 1"	5	80	CMF345B01028000	19,1	87	22	37
35 x 1"1/4	5	40	CMF345B14035000	21,4	100	27	46
42 x 1"1/2	2	30	CMF345B12042000	21,4	105	30	52
54 x 2"	2	20	CMF345C02054000	25,7	124,5	35	64

## Applications



HEATING



HVAC



COMPRESSED  
AIR