



## OT5525

Réduction filetage femelle/mâle.



### Spécifications techniques

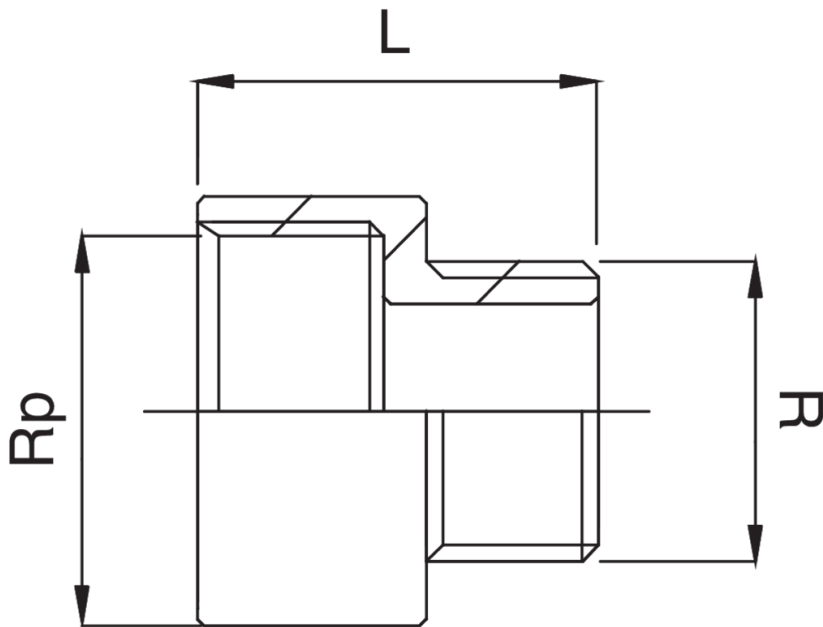

| RP X R        | BAG | MASTER BOX | CODE            | L  |
|---------------|-----|------------|-----------------|----|
| 3/8" x 1/4"   | 10  | 400        | OT5525A38A14000 | 23 |
| 1/2" x 3/8"   | 10  | 250        | OT5525A12A38000 | 24 |
| 3/4" x 3/8"   | 10  | 250        | OT5525A34A38000 | 28 |
| 3/4" x 1/2"   | 10  | 200        | OT5525A34A12000 | 28 |
| 1" x 1/2"     | 10  | 100        | OT5525B01A12000 | 30 |
| 1" x 3/4"     | 10  | 100        | OT5525B01A34000 | 31 |
| 1"1/4 x 1"    | 5   | 60         | OT5525B14B01000 | 35 |
| 1"1/2 x 1"1/4 | 5   | 70         | OT5525B12B14000 | 44 |
| 2" x 1"1/2    | 5   | 50         | OT5525B12C02000 | 55 |

## Applications



DRINKING  
WATER



HEATING



HVAC



GAS



COMPRESSED  
AIR



SOLAR



FIREFIGHTING