


**RR5001**

Curva 90° maschio-femmina.



Specifiche tecniche

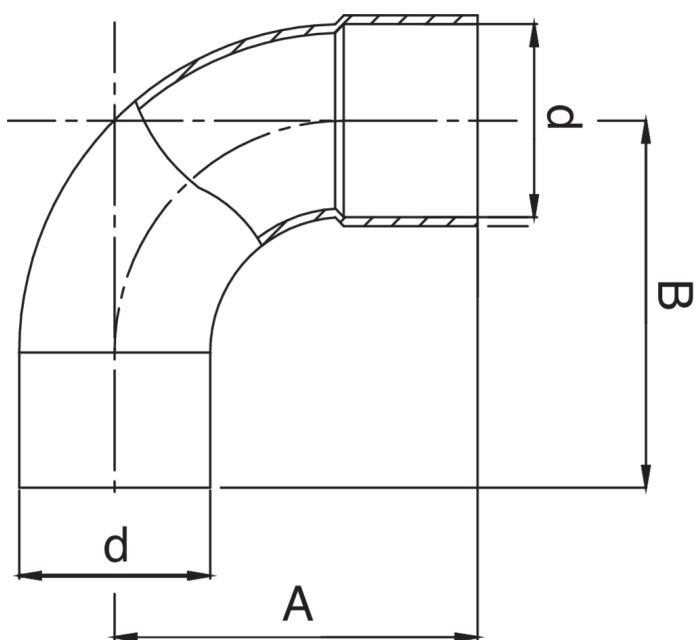

| D    | BAG | MASTER BOX | CODICE          | A     | B     |
|------|-----|------------|-----------------|-------|-------|
| 6    | 10  | 1000       | RR5001006006000 | 15,5  | 16    |
| 8    | 25  | 1000       | RR5001008008000 | 16,5  | 18    |
| 10   | 10  | 700        | RR5001010010000 | 19,5  | 21,5  |
| 12   | 10  | 400        | RR5001012012000 | 22    | 23,5  |
| 14   | 10  | 300        | RR5001014014000 | 27    | 29    |
| 15   | 10  | 300        | RR5001015015000 | 28    | 30    |
| 16   | 10  | 240        | RR5001016016000 | 28    | 30    |
| 18   | 10  | 150        | RR5001018018000 | 31    | 33    |
| 20   | 10  | 150        | RR5001020020000 | 40    | 42    |
| 22   | 10  | 100        | RR5001022022000 | 39    | 41    |
| 25   | 10  | 80         | RR5001025025000 | 44,5  | 46,5  |
| 28   | 10  | 60         | RR5001028028000 | 49    | 51    |
| 32   | 10  | 80         | RR5001032032000 | 60    | 62    |
| 35   | 5   | 80         | RR5001035035000 | 62    | 64,5  |
| 36   | 5   | 80         | RR5001036036000 | 62    | 64,5  |
| 40   | 5   | 50         | RR5001040040000 | 73,5  | 75    |
| 42   | 5   | 40         | RR5001042042000 | 75,5  | 78    |
| 52   | 1   | 10         | RR5001052052000 | 93,5  | 96    |
| 54   | 1   | 10         | RR5001054054000 | 93    | 99    |
| 64   | 1   | 5          | RR5001064064000 | 109,5 | 112,5 |
| 66,7 | 1   | 10         | RR5001067067000 | 127   | 130   |
| 76,1 | 1   | 8          | RR5001076076000 | 125   | 128   |
| 80   | 1   | 6          | RR5001080080000 | 153   | 155   |
| 88,9 | 1   | 6          | RR5001089089000 | 144,5 | 147,5 |
| 108  | 1   | 2          | RR5001108108000 | 179   | 180   |

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



GAS



COMPRESSED  
AIR



SOLAR



INDUSTRIAL