


## RR5040

Curva 45° maschio-femmina.



### Specifiche tecniche

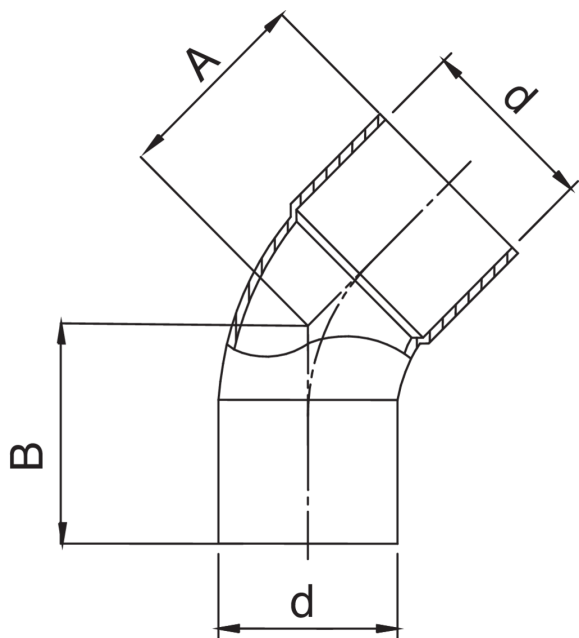

D	BAG	MASTER BOX	CODICE	A	B
6	10	1000	RR5040006006000	14	19
8	10	1000	RR5040008008000	14	19
10	25	800	RR5040010010000	12	14
12	10	600	RR5040012012000	13	14,5
14	10	400	RR5040014014000	15	17
15	10	400	RR5040015015000	15	17
16	10	500	RR5040016016000	15,5	17,5
18	10	250	RR5040018018000	18	20
20	10	400	RR5040020020000	21	23
22	10	100	RR5040022022000	21,5	23,5
28	10	80	RR5040028028000	25,5	27,5
32	5	100	RR5040032032000	31,5	33,5
35	5	100	RR5040035035000	33	35
36	5	100	RR5040036036000	33,5	35
40	5	80	RR5040040040000	37	39
42	5	50	RR5040042042000	38	40
52	5	10	RR5040052052000	45	48
54	1	10	RR5040054054000	46	48
63	1	20	RR5040063063000	52,5	56
64	1	25	RR5040064064000	62	64
66,7	1	15	RR5040067067000	52,5	57
76,1	1	15	RR5040076076000	58	62
88,9	1	5	RR5040089089000	65	70
108	1	2	RR5040108108000	79	82

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



GAS



COMPRESSED  
AIR



SOLAR



INDUSTRIAL